

BACK-LIT FLAT PANEL LIGHTS 35W-50W

A sleek and professional-looking solution for a variety of commercial and retail environments. With a consistent, even distribution of light, our flat panels are a perfect replacement for traditional ceiling troffers, bringing a clean, high-quality fixture.



FEATURES

- Slim, low profile design with superior uniformity
- High lumen output, ideal for illuminating large, open indoor spaces.
- Available in 35K, 40K and 50K.
- Life span of more than 50,000 hours.
- Wide input voltage, AC100 - 347V.
- Available in 35W and 50W.
- High-efficiency driver.
- High luminous CREE LED.
- Saves up to 60% energy consumption compared to traditional lighting.

GWL NOVUS

Product Parameters

| MODEL | WATTS | INPUT VOLTAGE | LUMINOUS FULX | CCT | CRI | BEAM ANGLE | WARRANTY | WORKING TEMP | MATERIAL |
|------------------------|-------|--------------------------------|---------------|-------|-----|------------|----------|--------------|-----------|
| GWL-BLFP-22-35-XX-PF-D | 35W | AC100-277V or AC100-347V | ≥4550lm | 3500K | ≥80 | 120° | 5 years | -30° -50° C | Aluminium |
| GWL-BLFP-14-35-XX-PF-D | 35W | | ≥4550lm | 4000K | | | | | |
| GWL-BLFP-24-50-XX-PF-D | 50W | | ≥6517lm | 5000K | | | | | |

Product Dimensions


GWL-BLFP-22-PF-XX-PF-D
23.74 x 23.74 x 1.5 in



GWL-BLFP-14-35-XX-PF-D
47.72 x 11.85 x 1.5 in



GWL-BLFP-24-50-XX-PF-D
47.72 x 23.74 x 1.5 in

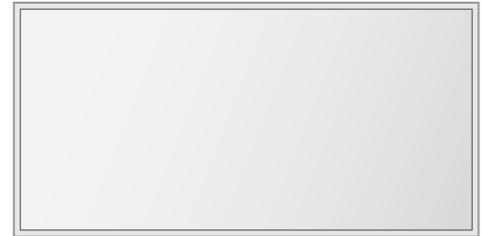

Product Order Code

| GWL | PF | XX | PF | XX | PF | D |
|------------|--|---|---|--|--|------------------------|
| GWL | PRODUCT SERIES BLFP - Back-lit Flat Panel | SIZE 22 - 2x2 FT 14 - 1x4 FT 24 - 2x4 FT | WATTAGE 35 - 35 watt 50 - 50 watt | INPUT VOLTAGE 27 - AC 100-277V 34 - AC 120V-347V | CCT 35K - 3000K 40K - 4000K 50K - 5000K | DIMMABLE D-Dimmable |

