

## ADJUSTABLE HIGH BAY 80W-300W

A terrific source of light for replacing any traditional metal halide lamps and linear fluorescent high bay systems. Our adjustable angled linear high bay blends outstanding technical innovation and quality design while reaching a high lumen output of 160lm/w.



### FEATURES


- Adjustable angled lens 30-60 degrees.
- Built-in thermal conductivity aluminum heat sink ensures excellent heat dissipation extending lifespan.
- Slim design, 50% slimmer than traditional high bays.
- Wide input voltage, AC100-277/AC200-480V
- Available in 80W, 100W, 150W, 185W, 240W and 300W.
- Anti-glare design.
- High efficiency up to 160lm/w is ideal for illuminating large areas.
- SMART control with ZigBee system available, tunable and dimmable controls.
- Saves up to 60% energy consumption compared to traditional lighting.

# GWL NOVUS


## Product Parameters

ORDER CODE	WATTS	INPUT VOLTAGE	LUMINOUS FLUX	CCT	CRI	BEAM ANGLE	WARRANTY	WORKING TEMP	MATERIAL
GWL-AHB-2-80-XX-PF-D	80W	AC100-277V or AC347-480V	≥12800	3500K 4000K 5000K	≥80	30-60°	5 years	-40° -50° C	Aluminium
GWL-AHB-2-100-XX-PF-D	100W		≥16000						
GWL-AHB-2-150-XX-PF-D	150W		≥24000						
GWL-AHB-4-185-XX-PF-D	185W		≥29600						
GWL-AHB-4--240-XX-PF-D	240W		≥38400						
GWL-AHB-4--300-XX-PF-D	300W		≥48000						

## Product Dimensions

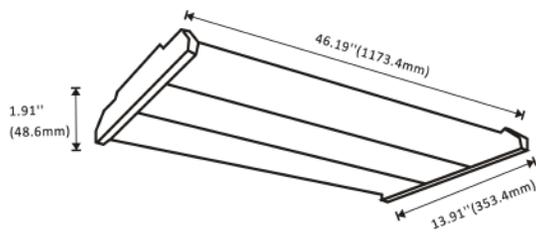

4FT Model -185W/240W/300W

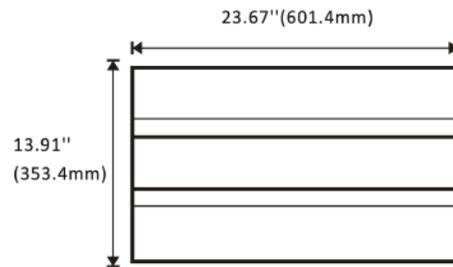

2FT Model -80W/100W/150W

## Product Order Code

<b>GWL</b>	<b>PF</b>	<b>XX</b>	<b>PF</b>	<b>XX</b>	<b>PF</b>	<b>D</b>
GWL	PRODUCT SERIES AHB - Angled High Bay	SIZE 2 - 2 FT 4 - 4 FT	WATTAGE 80 - 80 watt 100 - 100 watt 150 - 150 watt 185 - 185 watt 240 - 240 watt	INPUT VOLTAGE 27 - 100-277V 34- 120-347V	CCT 35K - 3000K 40K - 4000K 50K - 5000K	DIMMABLE D - Dimmable DS- Dimmable Motion Sensor

