

RECESSED LOW BAY 40W-90W

A state of the art design offering a professional-looking solution for a variety of commercial and retail environments. Our Recessed Low Bays offer a consistent even distribution of light, where illumination is required. Recessed design allows for installation in ceilings, providing a modern and low profile appearance.



FEATURES

- Outstanding optical design providing an efficient light source
- Recessed design allows for recessed ceiling installation
- Built-in thermal conductivity aluminum heat sink ensures excellent heat dissipation extending lifespan.
- Dimming to 10%
- Life span of more than 50,000 hours.
- Wide input voltage, AC100 - 347V.
- Available in 40W and 90W, custom power levels available.
- Available in High CRI.
- Available in White and Black body colour.
- Saves up to 60% energy consumption compared to traditional lighting.


GWL NOVUS

Product Parameters


MODEL	WATTS	INPUT VOLTAGE	LUMINOUS FLUX	CCT	CRI	BEAM ANGLE	WARRANTY	WORKING TEMP	MATERIAL
GWL-RLB-04-40-XX-PF-D	40W	AC100-277V or	≥4200lm	3500K 4000K	≥90	60-90°	5 years	-20° -50° C	Aluminium & PC
GWL-RLB-08-90-XX-PF-D	90W	AC100-347V	≥9450lm	5000K					

Product Dimensions

4FT

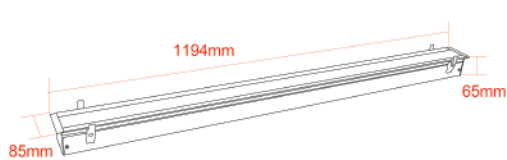

8FT

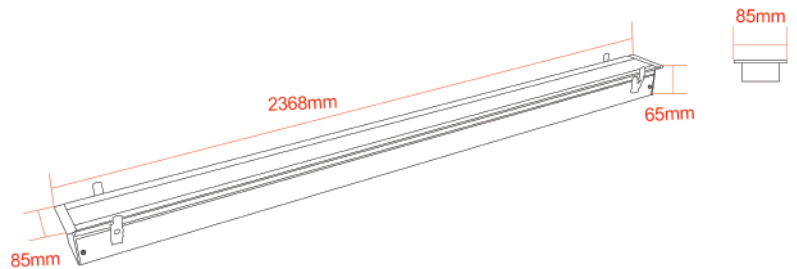

Product Order Code

GWL	PF	XX	PF	XX	PF	D
GWL	PRODUCT SERIES RLB - Recessed Low Bay	SIZE 04 - 4FT 08 - 8Ft	WATTAGE 40 - 40 watt 90 - 90 watt	INPUT VOLTAGE 120V - AC 100-277V 347V - AC 120V-347V	CCT 35K - 3000K 40K - 4000K 50K - 5000K	DIMMABLE D-Dimmable

