

VAPOUR PROOF LINEAR

A terrific source of light to be used in damp and high dust environments. Our vapour proof linear blends outstanding technical innovation and quality design while achieving improved uniformity.



FEATURES

- Outstanding optical design providing even light distribution.
- Anti-glare design enables a high safety rating.
- Built in thermal conductivity aluminum heat sink ensures excellent heat dissipation extending lifespan .
- Wide input voltage, AC100-277/AC120-347V
- Available in 40W.
- High lumen output is ideal for illuminating large areas.
- Suitable for wet locations IP66 rated.
- Saves up to 60% energy consumption compared to traditional lighting.


GWL NOVUS

Product Parameters

MODEL	WATTS	INPUT VOLTAGE	LUMINOUS FULX	CCT	CRI	BEAM ANGLE	WARRANTY	WORKING TEMP	MATERIAL
GWL-VPL-4-40-XX-PF-D	40W	AC100-277V	≥5,600lm	3500K	≥83	≥120	5 years	-20° - 40° C	Polycarbonate
	60W	AC120-347V	≥8,400lm	4000K 5000K					

Product Dimensions

GWL-VPL-4-40-XX-PF-D

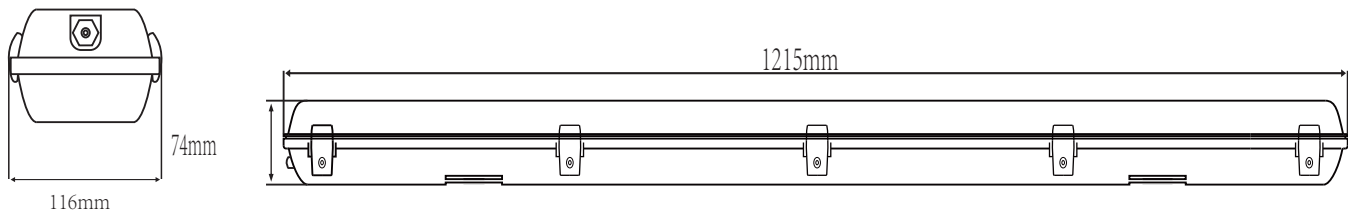

Product Order Code

GWL	PF	XX	PF	XX	PF	D
GWL	PRODUCT SERIES VPL - Vapour Proof Linear	SIZE 4 - 4ft	WATTAGE 40 - 40 watt 60 - 60 watt	INPUT VOLTAGE 27 - AC100-277V 34 - AC120-347V	CCT 35K - 3500K 40K - 4000K 50K - 5000K	DIMMABLE D - Dimmable DS - Dimmable Motion Sensor

