


Premium Vertical Door Refrigeration LED Strip

Improve your refrigerated door display lighting with the Premium Refrigeration LED Strip. This strip is designed to fit perfectly in mullion applications, with a special clip mounting option. Improve the look of your displayed product and improve your customer experience with premium colours using high CRI and High R9 colour rendering technology.

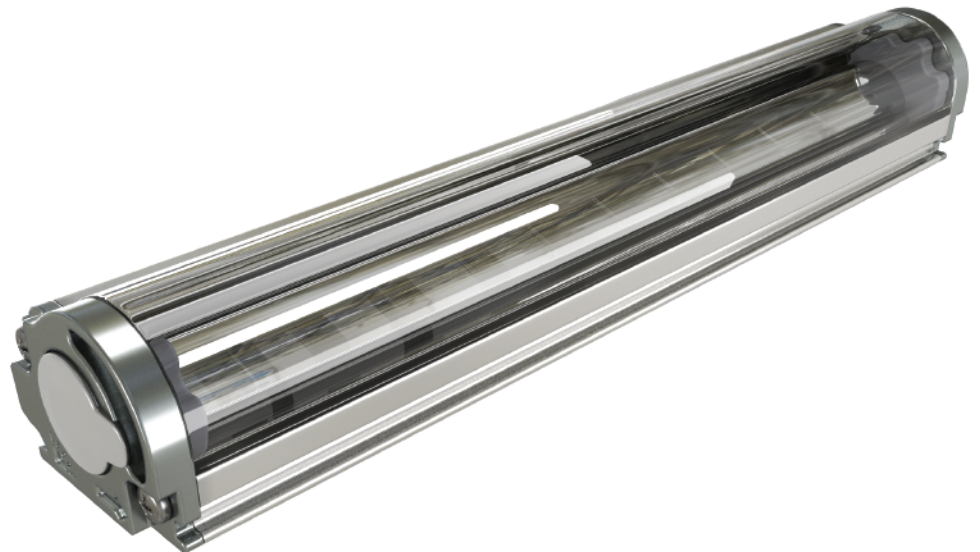

FEATURES


- Door model with integrated optical lens, provides the optimal light spread.
- Aluminum design provides optimal heat dissipation for long life and reliability.
- Shatterproof polycarbonate lens.
- Life span of more than 50,000 hours.
- Operates on remote driver (AC120-277v)
- Available in a variety of lengths.
- Available in 3000K to 5700K , Hi-Spectrum and CRI>90 and R9>70
- Saves up to 80% energy consumption compared to traditional lighting.

GWL NOVUS

Product Parameters

MODEL	WATTS	INPUT VOLTAGE	LUMINOUS FULX	CCT	CRI	BEAM ANGLE	WARRANTY	WORKING TEMP	MATERIAL	
DOOR GWL-AR-AL-D-1200-220-XXK-D-C95	22	Driver AC100-277V	> 2490 lm	3000K	≥95	105°	5 years	-30° - 45° C	Aluminium & PC	
	GWL-AR-AL-D-1500-270-XXK-D-C95	27	LED Strip DC 24V	> 3115 lm						4000K
	GWL-AR-AL-D-1800-320-XXK-D-C95	32		> 3700 lm						5600K HSP

Product Dimensions

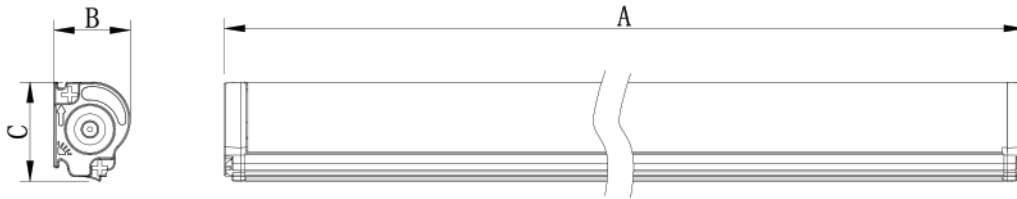

Length	4FT	5FT	6FT
A (MM)	1150	1430	1570
B (MM)	15	15	15
C (MM)	19.4	19.4	19.4

Product Order Code

GWL	PF	XX	PF	XXK	D	C95
GWL	PRODUCT SERIES AL-R- Aluminum Door	SIZE XXXX Millimeters	WATTAGE 220- 22 watt 270 - 27 watt 320 - 32 watt	CCT 30K - 3000K 40K - 4000K 56K - 5600K HSP - Hi Spectrum	D - DOUBLE END POWER	C93- CRI >95



Product Accessories



PLASTIC
MOUNTING CLIP
GWL-ALU-D-C



LED 4M CONNECTOR WIRE
GWL-DC-G4



80W, 100W, 150W LED DRIVER
FSL-LD2-XXX24V

