

## Vertical Refrigeration Door LED Strip

Improve your refrigerated door display case lighting with the Vertical Refrigeration LED Strip. This strip is designed to fit perfectly on centre and end mullions. Specially designed lenses help provide optimal spread across the doors, including french door configurations. Wire connections are hidden with a wire cover box, making retrofits clean and simple. A great upgrade from traditional door lighting as well as first generation LED Door Lighting.



### FEATURES


- Outstanding optical lens design providing an efficient light source and even light distribution for both traditional and french doors.
- Built-in thermal conductivity aluminum heat sink ensures excellent heat dissipation and extended lifespan.
- Shatterproof polycarbonate lens.
- Life span of more than 50,000 hours.
- Operates on remote driver (AC120-277v)
- Available in a variety of lengths.
- Aluminum profile design, hides LED's from being visible.
- Wire box cover hides wire connections for sleek and clean look.
- Saves up to 60% energy consumption compared to traditional lighting.

# GWL NOVUS

## Product Parameters

MODEL	WATTS	INPUT VOLTAGE	LUMINOUS FLUX	CCT	CRI	BEAM ANGLE	WARRANTY	WORKING TEMP	MATERIAL
GWL-FSL-F1-048-192-XXK-D-C80	19.2	Driver AC100-277V	>2310lm	3000K	≥80	160°	5 years	-30° - 45° C	Aluminium & PC
GWL-FSL-F1-060-240-XXK-D-C80	22.0	LED Strip DC 24V	>2700lm	3500K					
GWL-FSL-F0-072-288-XXK-D-C80	28.8		>3360lm	4000K 5000K					

## Product Dimensions

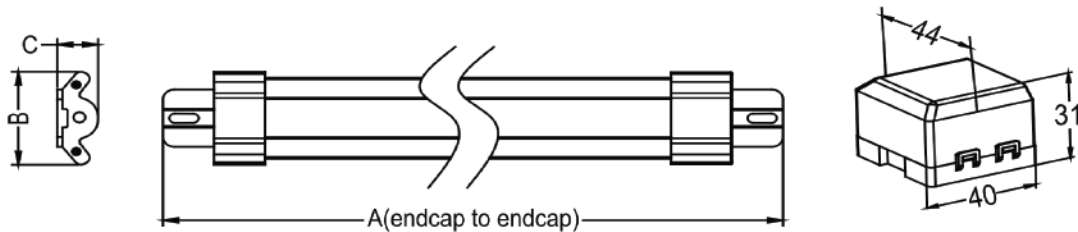

Length	4FT	5FT	6FT
A(mm)	1195	1500	1795
B(mm)	42.3±0.1		
C(mm)	16.1±0.1		

## Product Order Code

GWL	PF	XX	PF	XXK	D	CXX
GWL	PRODUCT SERIES	SIZE	WATTAGE	CCT		C80- CRI >80 C95- CRI >95 - R9>95
	FSL-F1 Vertical Refrigeration LED	048 - 4FT 060 - 5FT 072 - 6FT	192 - 19.2 watt 240 - 22.0 watt 288 - 28.8 watt	30K - 3000K 35K - 3500K 40K - 4000K 50K - 5000K		

